





STEP 1:
CUT A SQUARE PATCH OF
NOVATAK 8" WIDER THAN THE
WIDTH OF THE PENETRATION



STEP 2:
FIND THE CENTER OF THE
SQUARE BY FOLDING IT
INTO QUARTERS



STEP 3:
STAR-CUT CENTER OF
SQUARE TO THE WIDTH
OF THE PENETRATION
(TRIM FLANGES TO 2" MAX.
LENGTH)

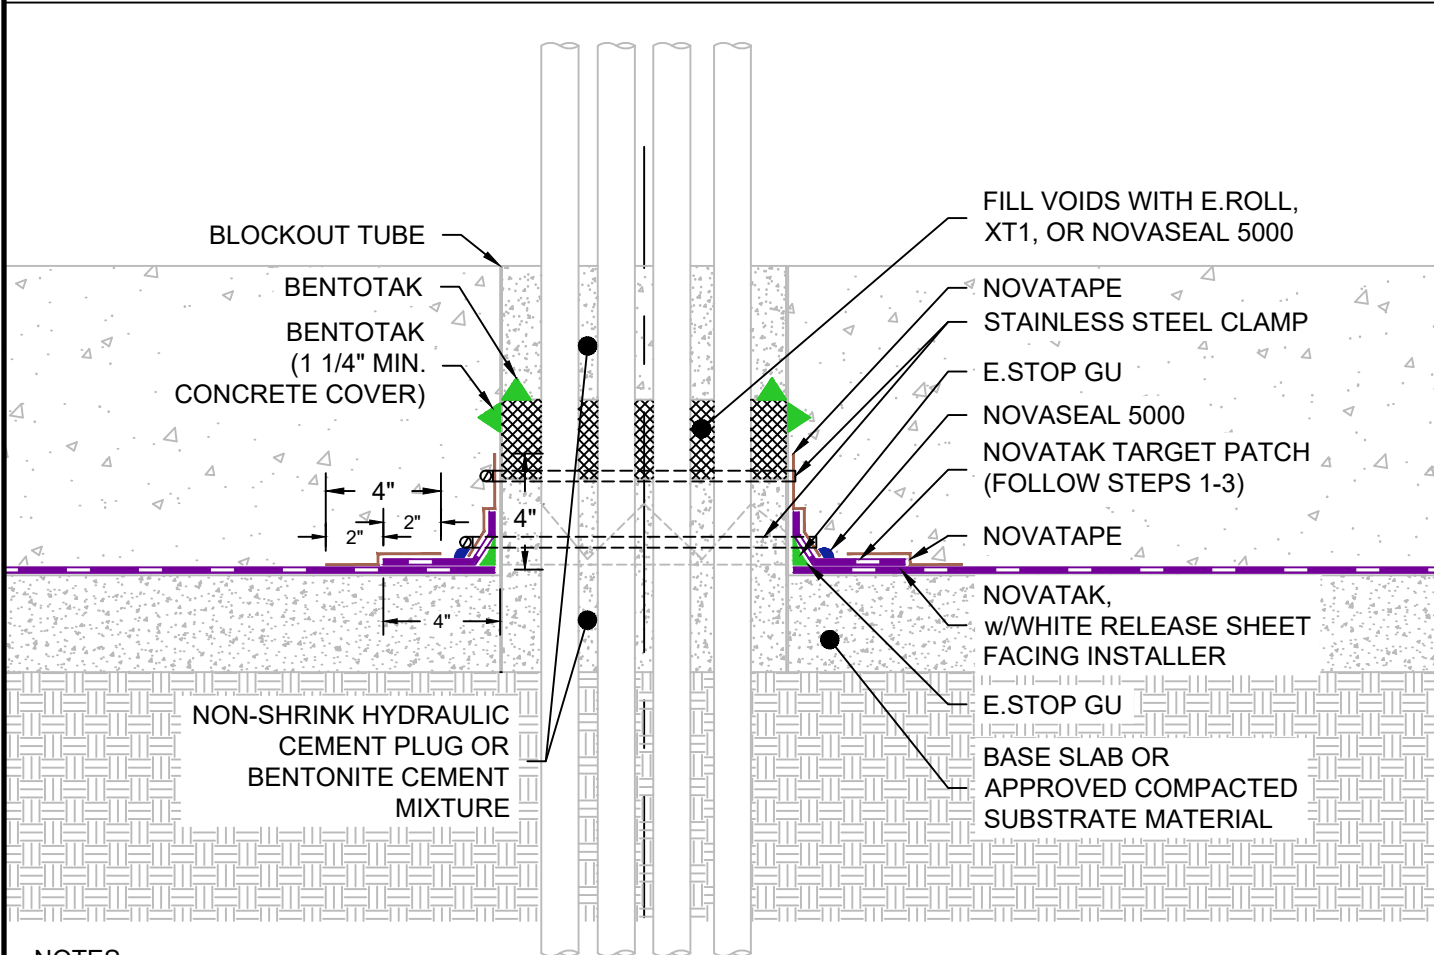

NOTES:

- 1) NOVATAK MEMBRANE BOOT MUST BE FIT SNUG AROUND BLOCKOUT TUBE WITHOUT FOLDING OR FALLING DOWN. NOVATAPE MUST BE USED TO COMPLETELY SEAL BETWEEN BOOT AND BLOCKOUT, TIGHTEN HOSE CLAMP AS TIGHT AS POSSIBLE WITHOUT DAMAGING THE MEMBRANE
- 2) SPACE PENETRATIONS A MINIMUM OF 6" FROM SLAB EDGE, CORNERS, WALLS, OR OTHER PENETRATIONS.

G:\My Drive\Epro Master Folder\Drafting\Details\Underslab\Novatak\50.128.2 UNDERSLAB PENETRATION - MULTI-CONDUIT/PIPE BUNDLE WITH LIMITED ANNULAR SPACE.dwg [Detail]
July 01, 2021 - 8:28am

UNDERSLAB PENETRATION - MULTI-CONDUIT/PIPE BUNDLE WITH LIMITED ANNULAR SPACE

| | | | |
|--|-------------|----------------|--|
| | SYSTEM NAME | DRAWING NUMBER | |
| | NOVATAK | 50.128.2 | |
| | DRAFTER | DATE | |
| | RJT | 6/21/2021 | |

AS A SUPPLIER OF FINISHED PRODUCTS ONLY, EPRO SERVICES, INC. DOES NOT ASSUME RESPONSIBILITY FOR ERRORS IN DESIGN, ENGINEERING OR DIMENSIONS. THE PROJECT TEAM MUST VERIFY ALL DIMENSIONS AND SUITABILITY OF DETAILS. THE PRODUCTS LISTED ARE TRADEMARKS OF EPRO SERVICES, INC.

NTS

PAGE 1 OF 1