




AD55 Spray Machine

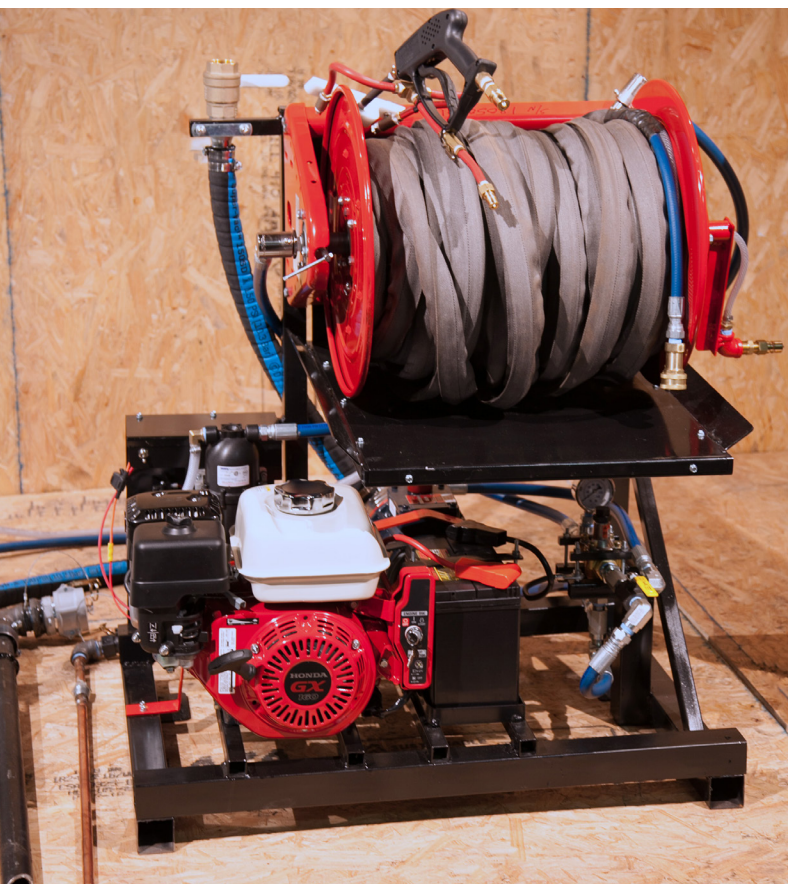

Product Description

The AD55 Spray Machine is designed to spray EPRO polymer modified asphalt products. The spray unit is designed to be easily transported around the jobsite or mounted inside a heated truck or trailer in cooler temperatures. The self-contained unit contains a pump for both the polymer modified asphalt and the catalyst.

Benefits

- Components are not proprietary and readily available
- Self contained unit can be transported very easily
- Pump specification maximize yield for EPRO asphalt emulsions
- Additional air compressor not required

Limitations

- Cooler temperatures, 45 degrees Fahrenheit, may require shelter from the elements

Technical Data

Engine: Honda GX160 Electric Start, with 12 volt batteries

Emulsion Pump: Wanner D11 Hydra-Cell - Heavy Duty

Bypass Valve: Wanner C22 Hydra-Cell - 500/1,000 psi

Reel: Reelcraft, 18" wide hand crank

Hose: 2 - 150' 3/8"

Catalyst Water Pump: 12 volt with accumulator and filter

Spray Gun: 1 hand gun, 1 pole gun, spray tips are included

Additional Spray Tips: 2 - 8801 catalyst, 1 - 4005 emulsion

Availability and Packaging

Contact EPRO sales representative or local distributors (www.eproinc.com).

Warranty

Limited Warranty: EPRO makes no other warranties with respect to this product, express or implied, including without limitation the implied warranties of MERCHANTABILITY OR FITNESS FOR PARTICULAR PURPOSE. EPRO shall have no other liability, including liability for incidental or resultant damages, whether due to breach of warranty or negligence. This warranty may not be modified or extended by representatives of EPRO or its distributors.

Equipment

Standard gasoline is required for operation.

Additional spray tips are available for purchase.

Technical Services and Information

Complete technical services and information are available by contacting EPRO at 800.882.1896 or www.eproinc.com.